


NOTE: WIRE ALL CONNECTIONS PIN 1 TO PIN 1 EXCEPT AS NOTED IN THE WIRE LIST.

REV	DESCRIPTION	DATE:	ALT. BY	APPROVED
A	CONVERTED TO CAD.	2-15-90	K. THOMAS	
B	INCRP ECO 92-80	12/7/92	R. KAHN	R COMPTON
C	REMOVE POLARIZING KEY	8/3/94	R. COMPTON	

MARK P/N AND REV. LETTER USING 1/8" HIGH CHARACTERS COLOR HIGH CONTRAST PERMANENT TYPE MARKING.

WIRE LIST	
TWIST	CONN.
10	16
11	15
12	14
13	13
14	12
15	11
16	10

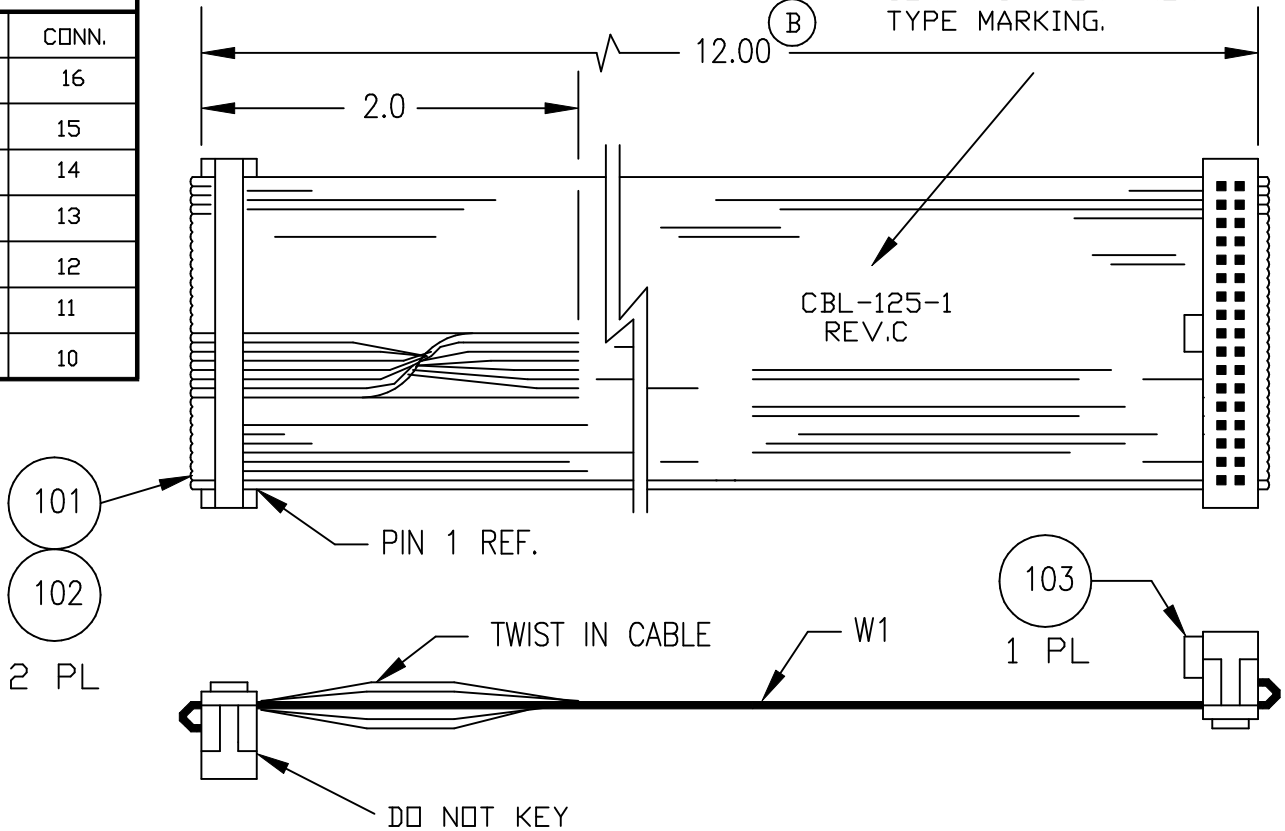

DET	REF	DESCRIPTION	MANUFACTURER	MPART NO.	WIN. NO.	-1	100
100	EI	FLOPPY DRIVE CABLE			CBL-125-1	1	
101	*	RIBBON CONN. 34 PIN	PANDUIT	050-034-455	270-0034-455		2
102	*	STRAIN RELIEF, 34 PIN	PANDUIT	050-000-034	271-0034-500		2
103	*	KEY, POLARIZING	PANDUIT	100-000-043	271-000-000		1
W1	**	28 AWG, RIBBON CABLE	PANDUIT	050F28V34-C	269-0034-000		14"
*		ALT IDC CONN IF USED MUST MEET MIL-C-83503 AND HAVE WINSYSTEMS APPROVAL					
**		ALT. WIRE MAY BE USED, MUST BE STYLE UL2651.					

NOTE: CABLE ASSY MUST BE ELECTRICALLY TESTED.

100

WinSystems, Inc.

"THE STD BUS AUTHORITY"

TITLE: CBL-125-1 (FLOPPY DRIVE CABLE)

APP. BY:	DATE:	TOL: ± .25	SCALE: NONE	DRAWING NO: CBL-125-1
DRAWN BY: K. THOMAS	DATE: 2/15/90	FSCM. NO: 1AU87	CAD ID: CBL1251B.DWG	SIZE: A REV: C SHT. 1 OF 1