


REV.	DESCRIPTION	DATE:	ALT. BY	APROVED
A	INITIATED DWG.	08-17-00	M.BROWNING	

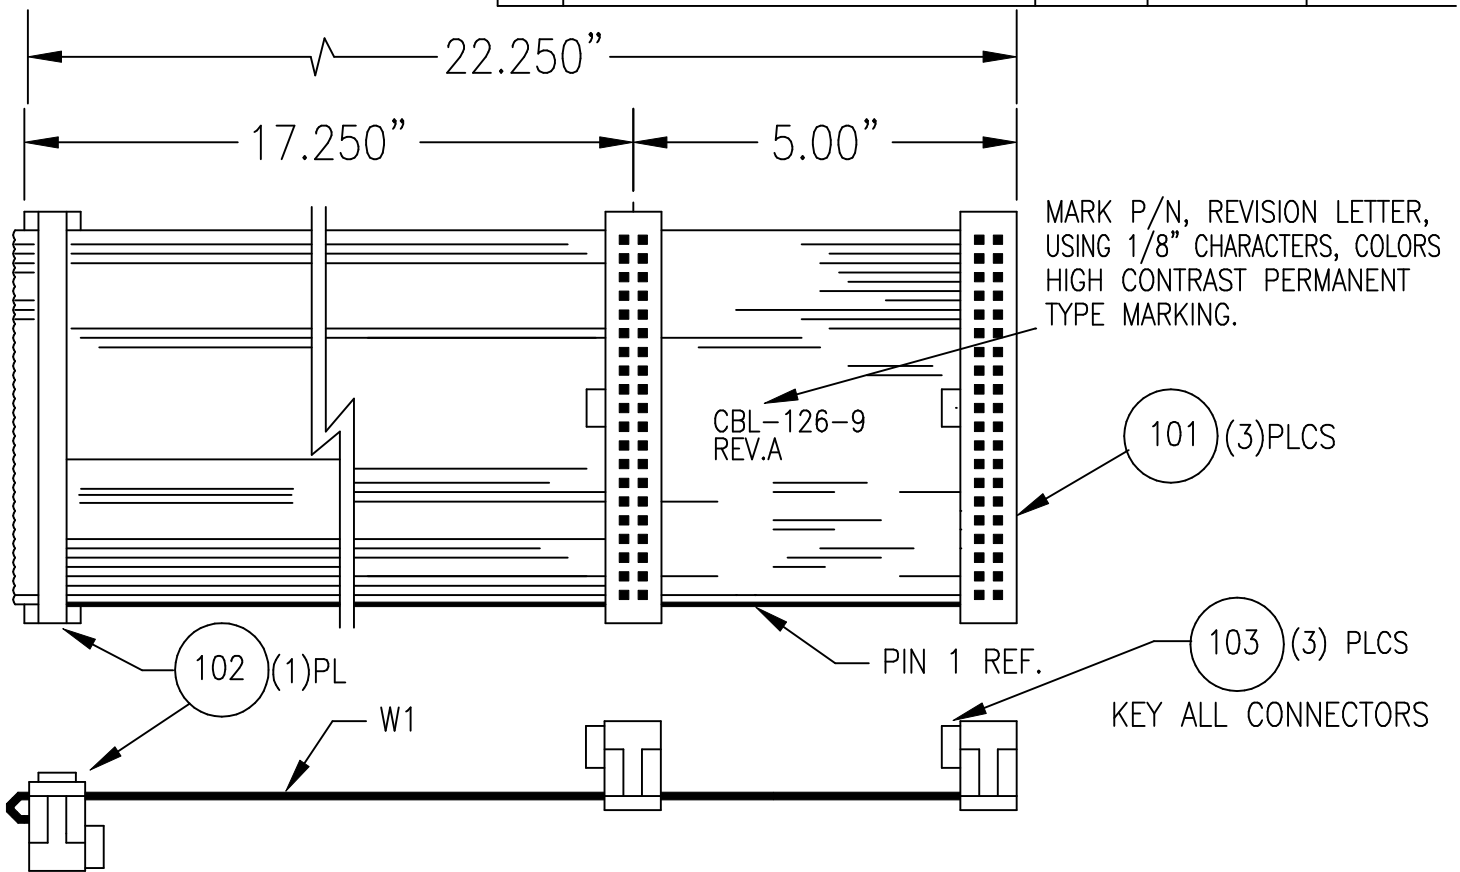

DET.	REF.	DESCRIPTION	MANUFACTURER	MPART NO.	WIN. NO.	-1	100		
100	EI	DUAL I.D.E. HARNESS, SDKII-PDK/STD			CBL-126-9	1			
101	*	RIBBON CONN. 40 PIN	PANDUIT	050-040-455	270-0040-455		3		
102	*	STRAIN RELIEF, 40 PIN	PANDUIT	050-000-040	271-0040-500		1		
103		POLARIZING KEY	PANDUIT	100-000-043	271-0000-000		1		
W1	**	28 AWG, RIBBON CABLE	PANDUIT	050F28V40-C	269-0040-000		22"		
*		ALT IDC CONN IF USED MUST MEET MIL-C-83503 AND HAVE WINSYSTEMS APPROVAL.							
**		ALT. WIRE MAY BE USED, MUST BE STYLE UL2651.							

NOTE: CABLE ASSY MUST BE ELECTRICALLY TESTED.

*WinSystems, Inc.*

"THE STD BUS AUTHORITY"

TITLE: *CBL-126-9 DUAL I.D.E.  
SDK2-PDK-II for PPC-XX/STD-CX15-D*

DRW. BY: M.BROWNING      DATE: 08-17-00      APP. BY:      DATE:

ACAD ID: CBL1269.DWG	SCALE: NOTED	TOL:
FSCM. NO:	DRW. NO:	REV: A      SHT. 1 OF 1

FULL SCALE

PART NO.	CBL-126-9			
TOLERANCE UNLESS NOTED	(0.0)	(0.00)	(0.000)	ANG.
	±	±	±	±

100