


WIRE ASSIGNMENT		
REF.	PIN	SIGNAL
W2	1	RESET
W1	2	GND
W3	3	PWR BTN

REV.	DESCRIPTION	DATE:	ALT. BY	APPROVED
A	DRAFTED	04.22.09	M.BROWNING	

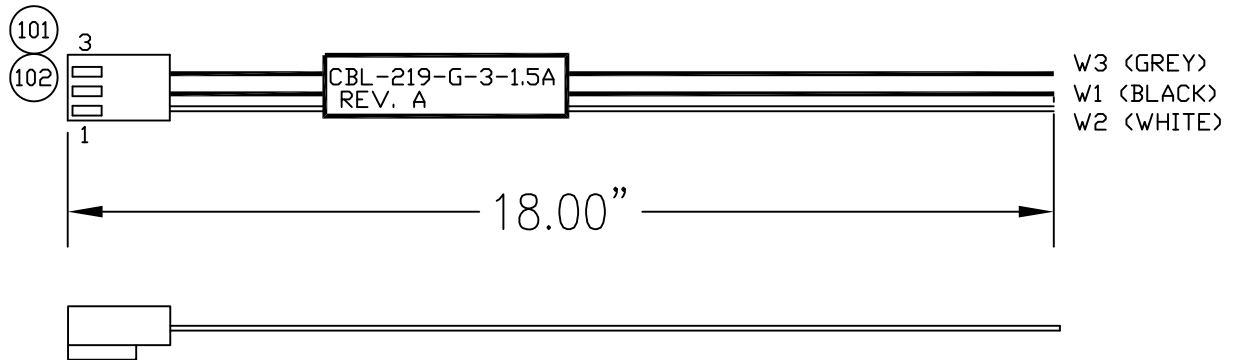

**Assembly Must Comply With Specifications of Manufacture and Acceptance (RoHS M&A)
of RoHS Compliant Cable and Cable Assemblies for WinSystems, Inc.
Rev B 11.11.2008**

DET.	REF.	DESCRIPTION	MANUFACTURER	MPART NO.	WIN. NO.	-1	100		
100	EI					1			
101		.1" Pitch KK Crimp Terminal Housing, 7880 High Pressure, 3 Circuits	MOLEX	10-11-2033			1		
102		KK High Pressure Crimp Terminal 7879, 22-30 AWG, Bag Selective Gold (Au)		08-55-0129			3		
*		ALT. CRIMP PIN MAY BE USED. MOLEX 08-55-0124.							
W1	**	WIRE, 22 AWG. BLACK	ALPHA	7055/19-2			18"		
W2	**	WIRE, 22 AWG. WHITE	ALPHA	7055/19-1			18"		
W3	**	WIRE, 22 AWG. GREY	ALPHA	7055/19-9			18"		
**		ALT. WIRE MAY BE USED. STYLE UL1429 / MIL-W-16878D TYPE B							

WinSystems, Inc.
"THE STD BUS AUTHORITY"

TITLE:
CBL-219-G-3-1.5A

DRW. BY: M.BROWNING DATE: 04.22.09 APP. BY: DATE:

ACAD ID: SCALE: NOTED TOL: REV: A SHT. 1 OF 1

FULL SCALE

PART NO.	TOLERANCE UNLESS NOTED	(0.0)	(0.00)	(0.000)	ANG.
100	±	±	±	±	

100