

5

4

3

2

1


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	DRAFTED	5/30/01	M.BROWNING
	B	ADD (1)40 PDS., MOVED EXISTING	8/06/01	M.BROWNING
	C	REMOVE KEY FROM J3 ECD 01-56	10/29/01	M.BROWNING

J3 WIRE LIST	
TWIST	CONN.
10	16
11	15
12	14
13	13
14	12
15	11
16	10

18.00" LENGTH, ALL BRANCHES

NOTE: WIRE ALL CONNECTIONS PER PAGES 3&4 EXCEPT AS NOTED IN THIS WIRE LIST.

TWIST IN CABLE

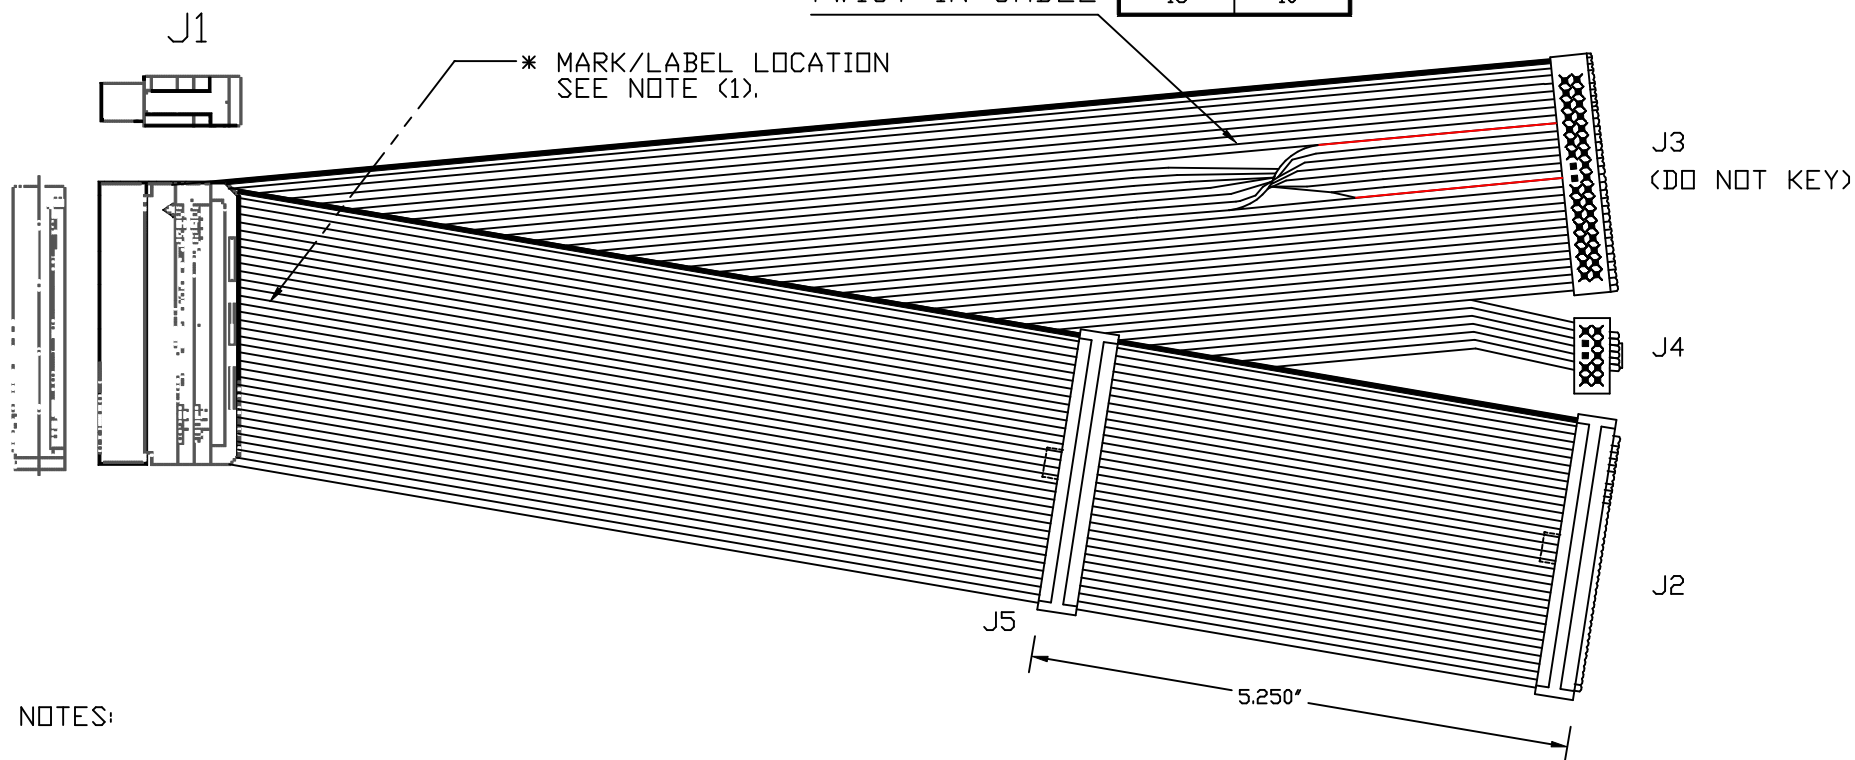

NOTES:

(1) MARK/LABEL ASSEMBLY USING HIGH CONTRAST TEXT, WITH PART NUMBER AND REVISION LETTER, USE PERMANENT TYPE MARKING.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE FRACTIONS ANGLES +/- 1/2" DECIMALS: .XX ± .03 .XXX ± .010	CUSTOMER APPROVAL	DATE	WinSystems, Inc. "THE STD BUS AUTHORITY" CBL-252-1 MULTI DRIVE DUAL IDE, FLOPPY, USB
MACHINE FINISH ✓	APPROVAL	DATE	
	CHECKER	DATE	
	DRAFT/DESIGN M.BROWNING	DATE 05/30/01	

SIZE C	CAGE CODE 1AUB7	DWG NO. CBL2521S1.DWG	REV C
SCALE	CAD ID	SHEET 1 OF 2	

5


4

3

2

CBL2521S1.DWG¹

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	DRAFTED	5/30/01	M.BROWNING
	B	ADD (1)40 POS, MOVED EXISTING	8/06/01	M.BROWNING
	C	REMOVE KEY FROM J3	10/29/01	M.BROWNING

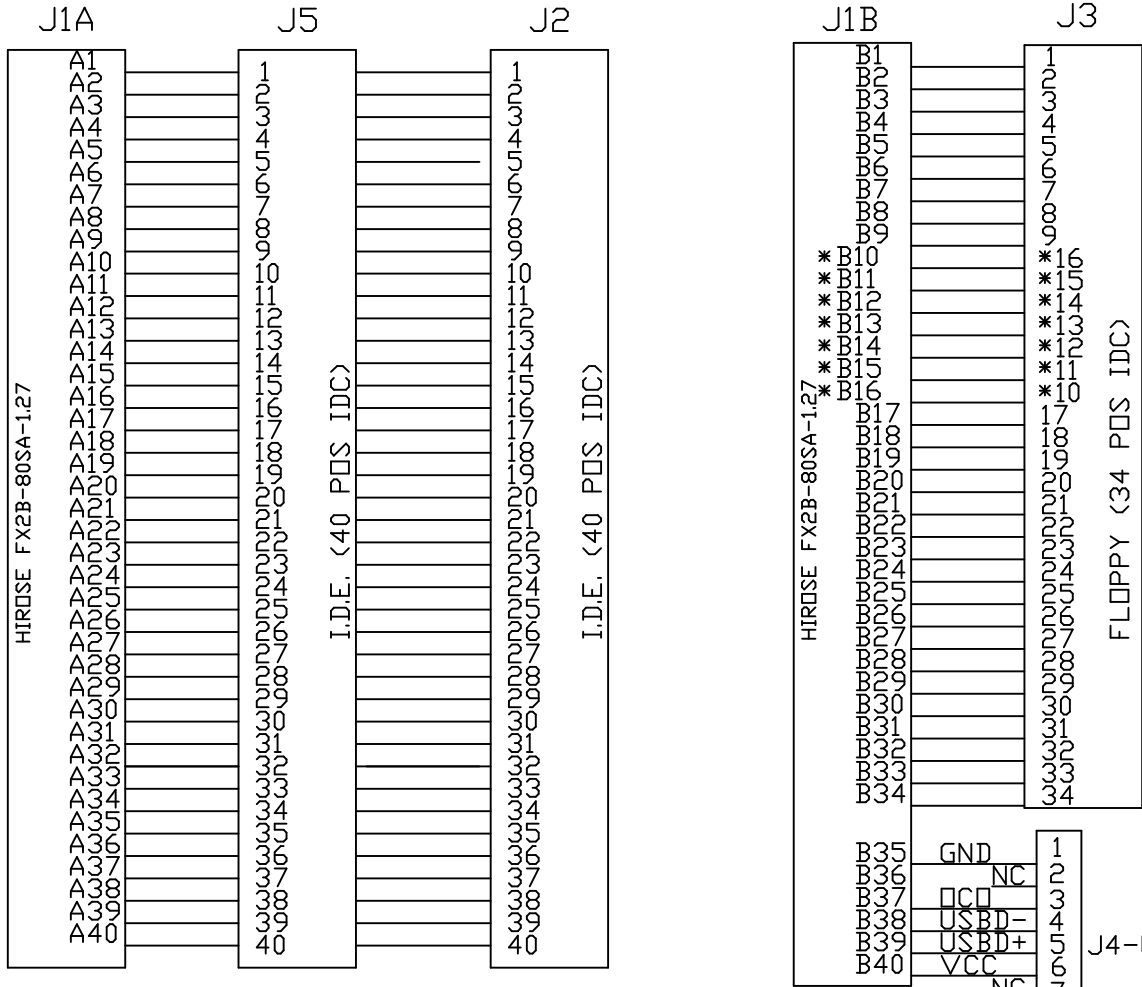

* PINS OUT OF SEQUENCE REPRESENT TWIST IN 34 POSITION CABLE.

QTY.	REF.	MFG/PART NUMBER (DESCRIPTION)
1	J1	HIROSE/ FX2BA-80SA-1.27R
2	J2,J5	*PANCON ITW 050-040-455 (40 POS IDC RIBBON CONNECTOR)
1	J3	*PANDUIT 050-034-455 (34 POS IDC RIBBON CONNECTOR, UN-KEYED)
1	J4	*PANDUIT 050-010-455 (10POS IDC RIBBON CONNECTOR)
38.00'		*PANDUIT 050F28V10-C (RIBBON CABLE 40 CONDUCTOR)
	*	ALTERNATE ALLOWED: WITH AN APPROVED EQUIVALENT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
 TOLERANCE
 FRACTIONS ANGLES +/- 1/2"
 DECIMALS: .XX ± .03 .XXX ± .010
 MACHINE FINISH
 ✓

CUSTOMER APPROVAL	DATE
APPROVAL	DATE
CHECKER	DATE
DRAFT/DESIGN M.BROWNING	DATE 05/30/01

WinSystems, Inc.
 "THE STD BUS AUTHORITY"
 CBL-252-1, MULTI-DRIVE IDE, FLOPPY, USB

SIZE C	CAGE CODE 1AUB7	DWG NO. CBL2521S2.DWG	REV C
SCALE	CAD ID: CBL2521S2.DWG	SHEET 2 of 2	