


18.00" LENGTH, ALL BRANCHES

NOTE: WIRE ALL CONNECTIONS PER PAGES 3&4 EXCEPT AS NOTED IN THIS WIRE LIST.

TWIST IN CABLE

J3 WIRE LIST	
TWIST	CONN.
10	16
11	15
12	14
13	13
14	12
15	11
16	10

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	DRAFTED	5/30/01	M.BROWNING
	B	ADD (1)40 POS., MOVED EXISTING	8/06/01	M.BROWNING
	C	REMOVE KEY FROM J3	10/29/01	M.BROWNING
	D	RoHS	02.20.07	M.BROWNING
	E	ECD 09-54 BOM, NO POLARIZ. J3,J4	09.16.09	M.BROWNING

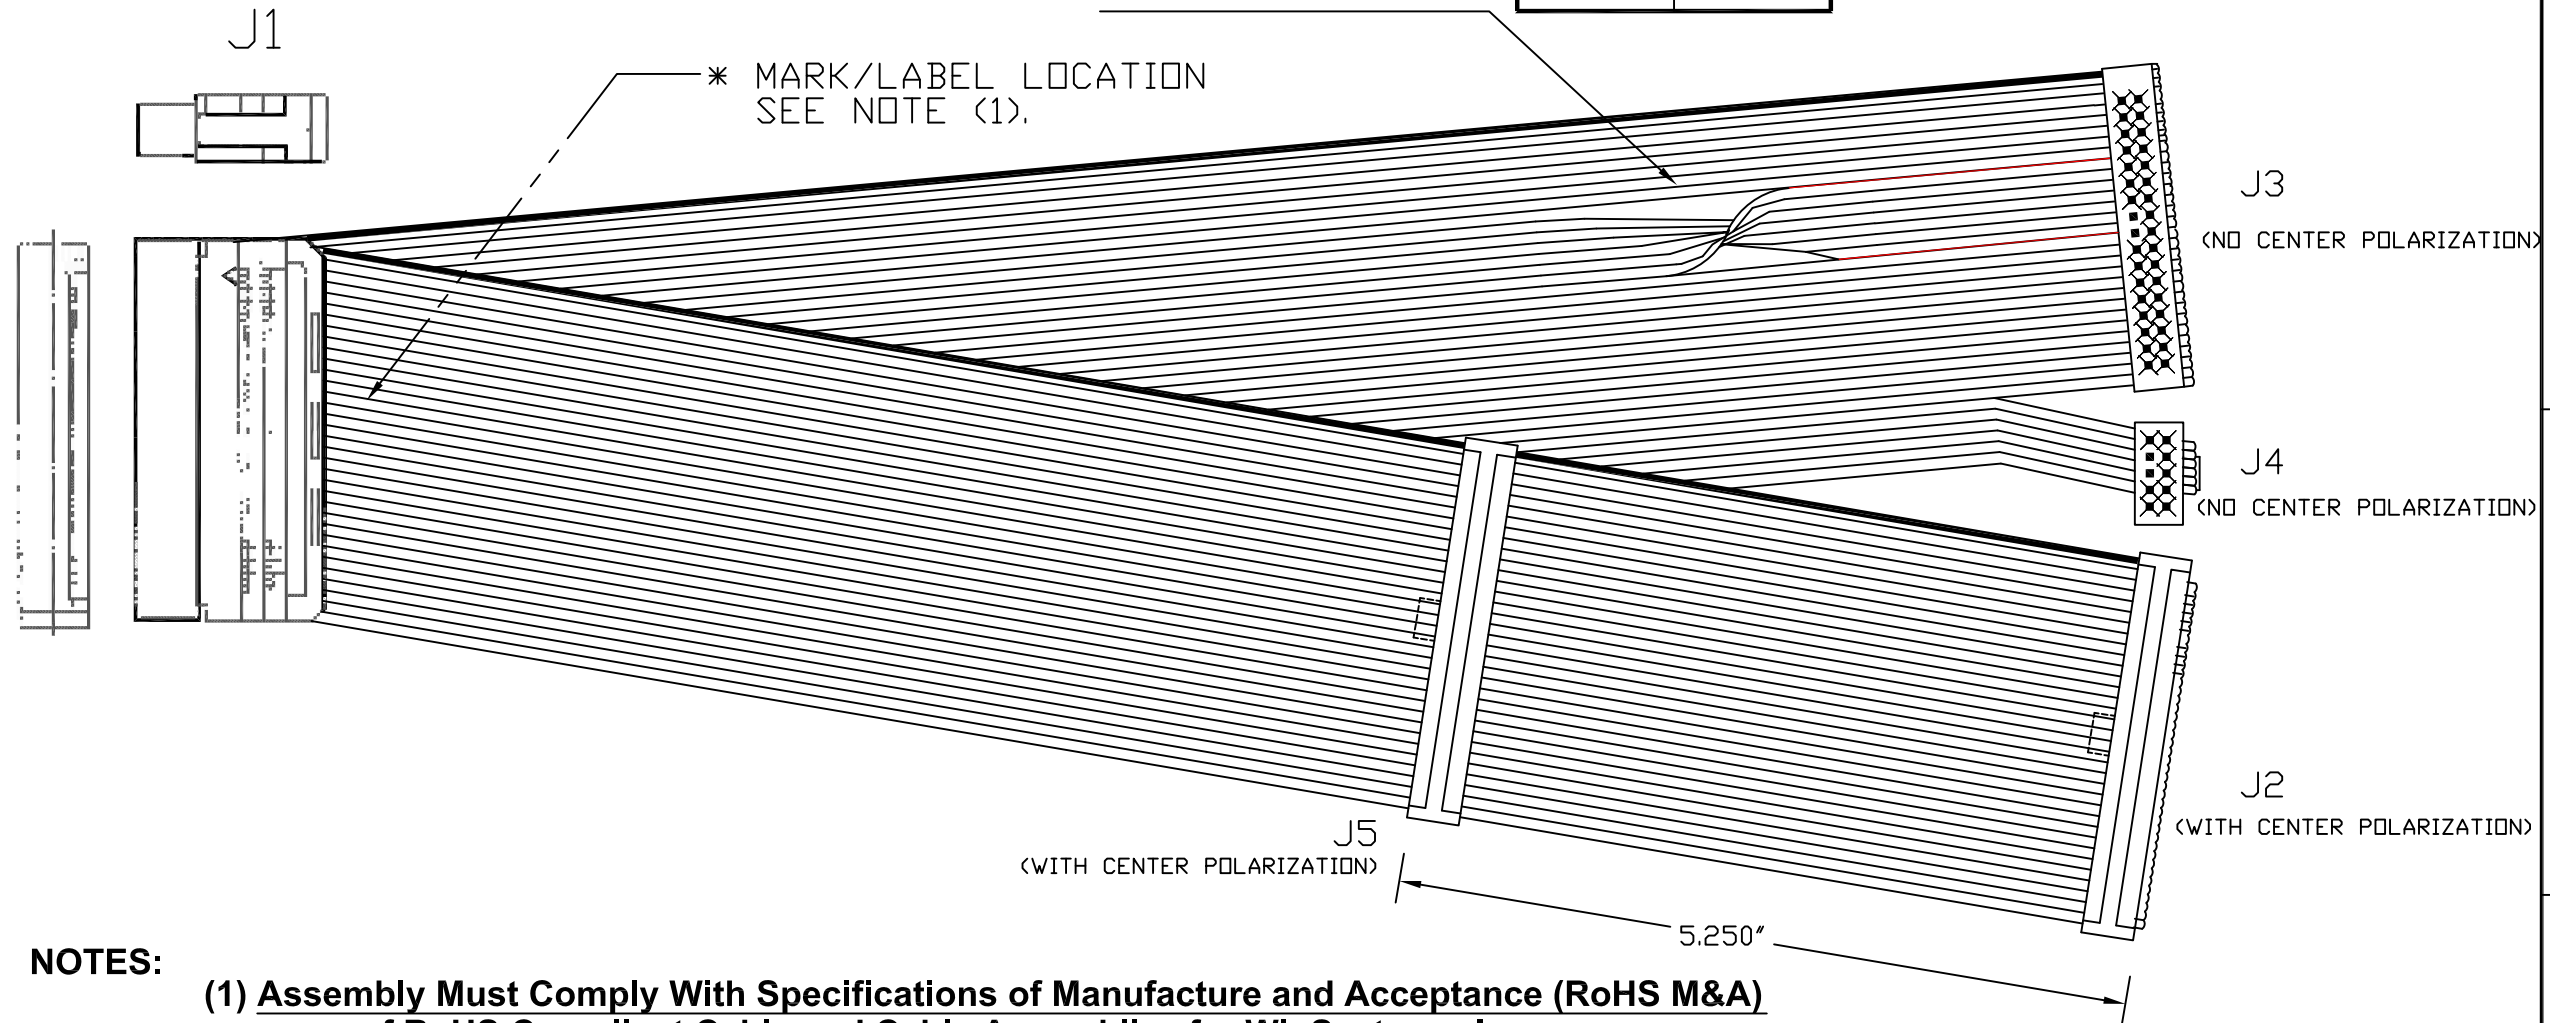


NOTES:

(1) Assembly Must Comply With Specifications of Manufacture and Acceptance (RoHS M&A) of RoHS Compliant Cable and Cable Assemblies for WinSystems, Inc.

Rev B 11.11.2008

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE FRACTIONS ANGLES +/- 1/2" DECIMALS: .XX ± .03 .XXX ± .010	CUSTOMER APPROVAL	DATE	WinSystems, Inc. "THE STD BUS AUTHORITY"				
	APPROVAL	DATE					
MACHINE FINISH: ✓	CHECKER	DATE	*RoHS* CBL-252-G-1-1.5E DUAL IDE, FLOPPY, USB				
	DRAFT/DESIGN M.BROWNING	DATE 05/30/01					
	SCALE	CAD ID:	SIZE C	CAGE CODE 1AUB7	DWG NO. CBL-252-G-1-1.5E	REV E	SHEET 1 OF 2

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	DRAFTED	5/30/01	M.BROWNING
	B	ADD (1)40 POS., MOVED EXISTING	8/06/01	M.BROWNING
	C	REMOVE KEY FROM J3	10/29/01	M.BROWNING
	D	RoHS	02.20.07	M.BROWNING
	E	ECD 09-54 NO POLARIZATION: J3,J4	06.24.09	M.BROWNING

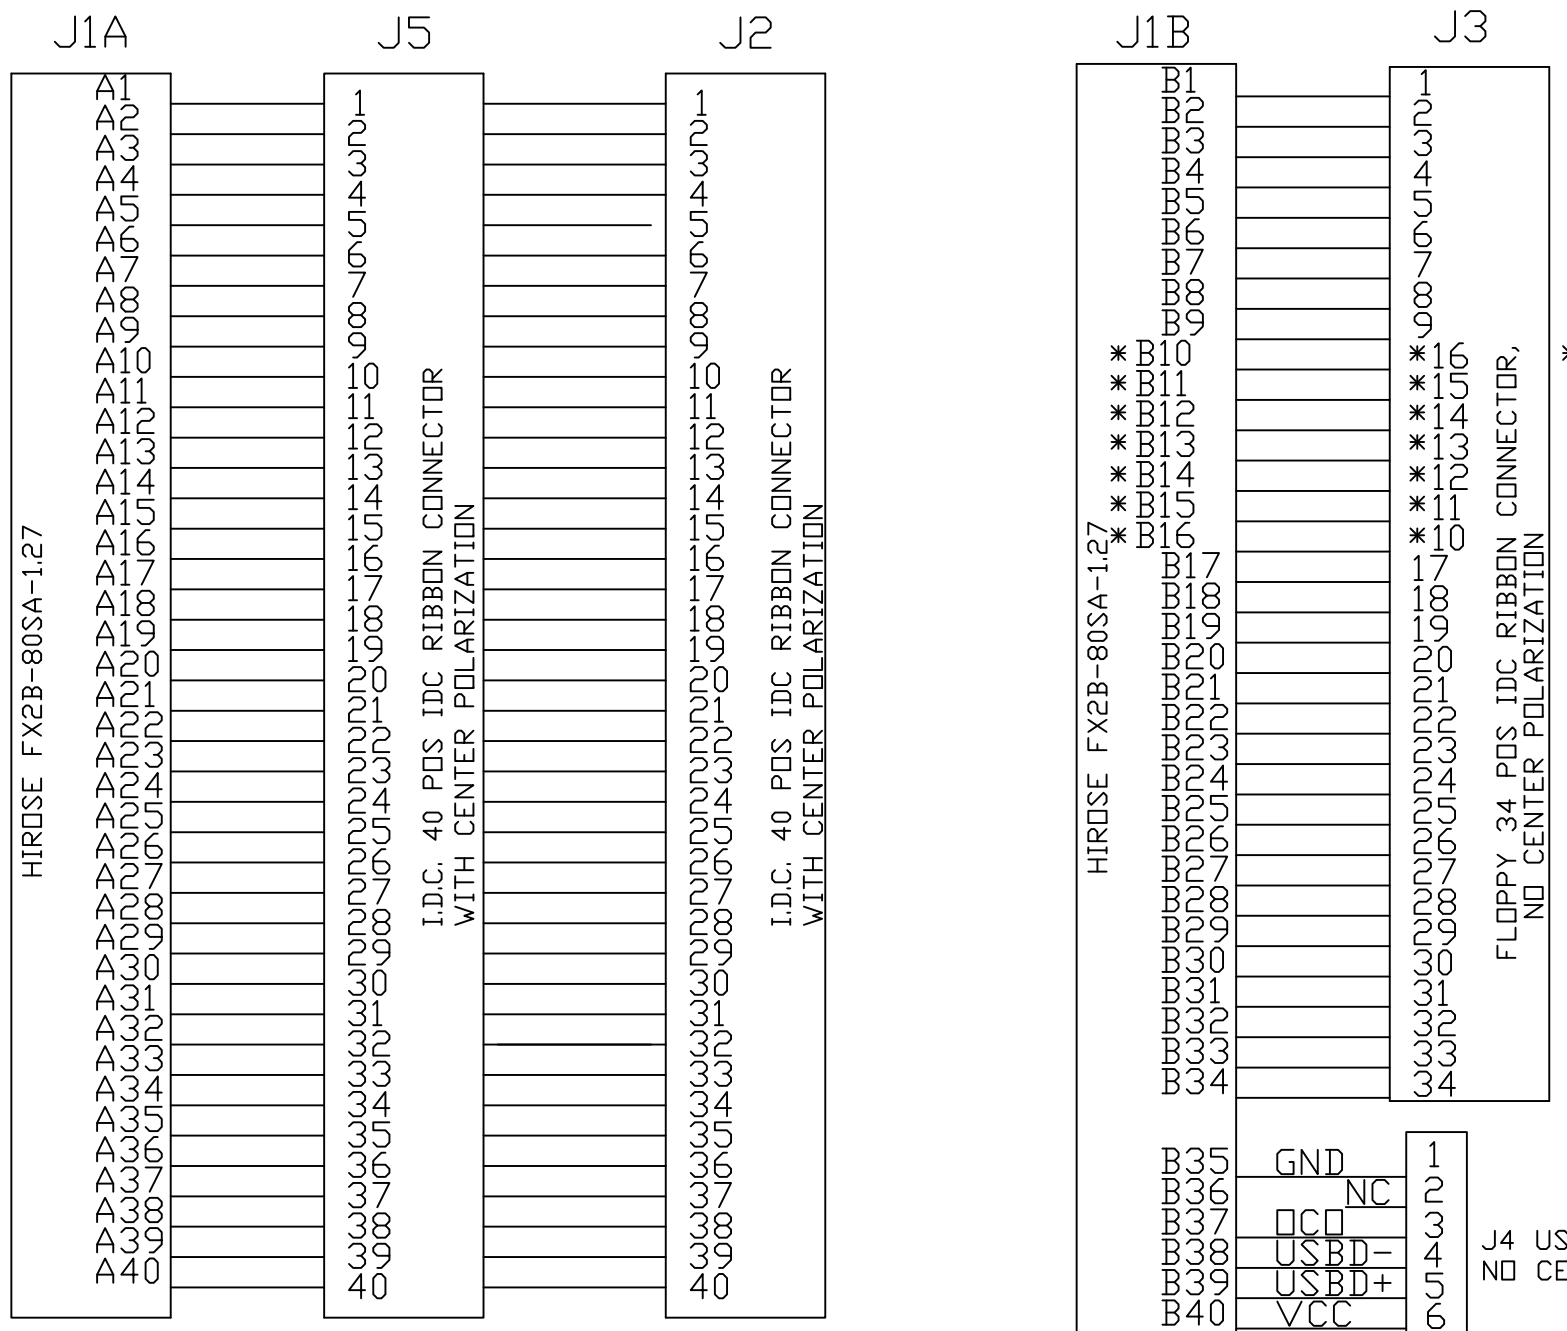

* PINS OUT OF SEQUENCE REPRESENT TWIST IN 34 POSITION CABLE.

J4 USB 10 POS IDC RIBBON CONNECTOR, NO CENTER POLARIZATION

***ALL ALTERNATES MUST BE ELECTRICAL and MECHANICAL EQUIVALENTS to SPECIFIED PARTS, and must be RoHS COMPLIANT.**
RoHS Compliance Notice: All Vendors providing quotations and/or materials to WinSystems, Inc., must supply a RoHS Directive "Certificate of Compliance", referencing the part number(s) of delivered items.

DET	REF	DESCRIPTION	MANUFACTURER	MPART NO.	WIN. NO.	-1	100	RoHS Compliance
100	EI					1		
J1		HIROSE FX2BA-80SA-1.27R	HIROSE	FX2BA-80SA-1.27R			1	RoHS
J2,J5	**	40 POS IDC RIBBON CONNECTOR WITH CENTER POLARIZATION	ITW PANCON	050-040-455A			2	RoHS
J3		34 POS IDC RIBBON CONNECTOR, NO CENTER POLARIZATION	ITW PANCON	050-034-455			1	RoHS
J4	**	10 POS IDC RIBBON CONNECTOR, NO CENTER POLARIZATION	ITW PANCON	050-010-455			1	RoHS
		10 POS STRAIN RELIEF	ITW PANCON	050-000-010			1	RoHS
		40 POS RIBBON CABLE	ITW-PANCON	050F28V40-CR			38.00*	RoHS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE FRACTIONS ANGLES +/- 1/2" DECIMALS: .XX ± .03 .XXX ± .010	CUSTOMER APPROVAL	DATE
	APPROVAL	DATE
	CHECKER	DATE
	DRAFT/DESIGN M.BROWNING	DATE 05/30/01

WinSystems, Inc.
 "THE STD BUS AUTHORITY"

CBL-252-G-1-1.5E
 IDE, FLOPPY, USB

SIZE C	CAGE CODE 1A087	DWG NO. CBL-252-G-1-1.5E	REV E
SCALE	CAD ID:	SHEET 2 of 2	