


**18.00" LENGTH  
(+/- .125")**

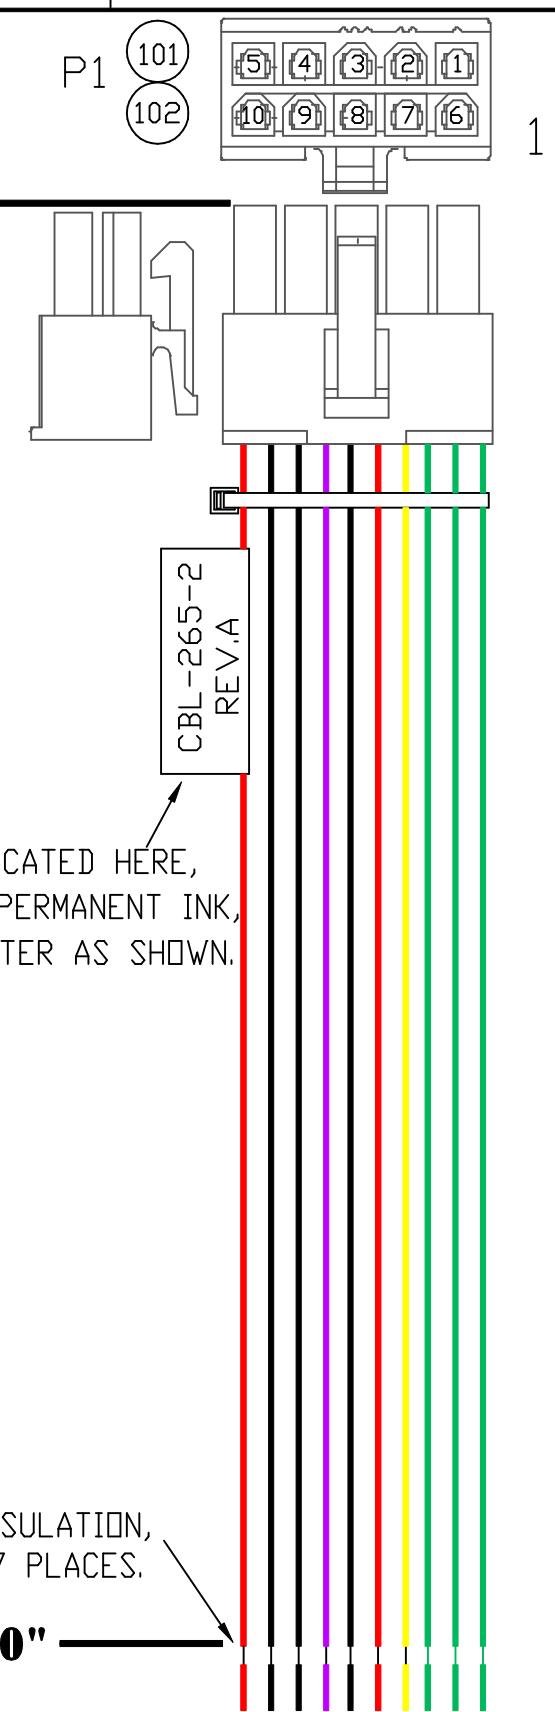

LABEL CABLE ASSY. LOCATED HERE,  
WITH PRINTED LABEL, PERMANENT INK,  
INCLUDE REVISION LETTER AS SHOWN.

\*STRIP .250", RETAIN INSULATION,  
7 PLACES.  
**0.00"**

P1	DET	WIRE	SIGNAL
8	W1	18 AWG. RED	+5V
2	W2	18 AWG. BLACK	GND
3	W2	18 AWG. BLACK	GND
4	W3	18 AWG. VIOLET	+12V
7	W1	18 AWG. RED	+5V
9	W4	18 AWG. YELLOW	-12V
1	W5	18 AWG. GREEN	UN-USED
5	W5	18 AWG. GREEN	UN-USED
6	W5	18 AWG. GREEN	UN-USED
10	W5	18 AWG. GREEN	UN-USED

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	INITIATED	10/29/04	M.E.B.

DET.	REF.	DESCRIPTION	MANUFACTURER	MPART NO.	WIN. NO.	-1	100
	100	EI	DC HARNESS, UNTERMINATED, EPX		CBL-265-2	1	
P1	101	*	HOUSING, .165" PITCH MINI-FIT JR. RECEPTACLE 5557 DUAL ROW	MOLEX	39-01-2105		1
	102	*	TERMINAL, 5556 CRIMP FEMALE	MOLEX	39-00-0038(REEL) / -0039 (BAG)		10
	103		TIE WRAP 4"	MOUSER	4810102	500-0050-000	1
	W1	**	WIRE, 18 AWG. RED	ALPHA	7057/19-3		36"
	W2	**	WIRE, 18 AWG. BLACK	ALPHA	7057/19-2		54"
	W3	**	WIRE, 18 AWG. VIOLET	ALPHA	7057/19-10		18"
	W4	**	WIRE, 18 AWG. YELLOW	ALPHA	7057/19-5		18"
	W5	**	WIRE, 18 AWG. GREEN	ALPHA	7057/19-4		72"
	*		NO ALTERNATES ALLOWED UNLESS SPECIFIED.				
	**		ALT. WIRE MAY BE USED. STYLE UL1429 / MIL-W-16878D TYPE B				

NOTES:  
(1) UNLESS OTHERWISE NOTED,  
ALL DIMENSIONS TOLERANCES ±.125"  
(2) CABLE MUST BE ELECTRICALLY TESTED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE FRACTIONS: ANGLES: +/- 1/2" DECIMALS: .XX ± .03 .XXX ± .010	CUSTOMER APPROVAL	DATE	<b>WinSystems, Inc.</b> "THE STD BUS AUTHORITY" <b>CBL-265-2</b> DC HARNESS, UNTERMINATED, EPX
	APPROVAL	DATE	
MACHINE FINISH: ✓	CHECKER	DATE	SIZE: C CAGE CODE: 1AU87 DWG NO.: CBL2652.DWG REV: A SCALE: CAD ID: \DWG\STD\CBL\CBL2652.DWG SHEET 1 OF 1
	DRAFT/DESIGN M. BROWNING	DATE 10/29/04	