

5

4

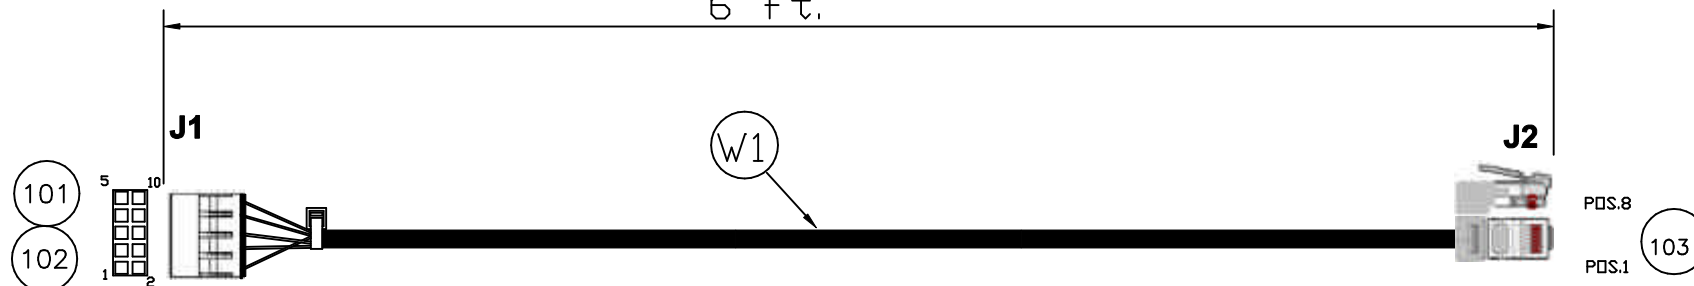
3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A		11/10/04	M.BROWNING

6 ft.

CBL-267-3
REV.A

MARK CABLE WITH P/N
REV .LETTER, USING PERMANENT
"TYPE" MARKING.

*NOTES:

(1) CABLE ASSY MUST BE ELECTRICALLY TESTED.

WIRE LIST

J1(10 POS.)	J2 (RJ45 PLUG)	SIGNAL	WIRE COLOR
1	1	TX+	ORANGE/WHITE
2	2	TX-	ORANGE
3	3	RX+	GREEN/WHITE
4			
5			
6	6	RX-	GREEN
7			
8			
9			
10			

DET.	REF.	DESCRIPTION	MANUFACTURER	MPART NO.	WIN. NO.	-1	100
100	EI	EPX, 10 POS TO RJ45 PLUG			CBL-267-3	1	
101	J1	2.00mm PITCH, MILLI-GRID CRIMP HOUSING 51110	MOLEX	51110-1051			1
102	*	CRIMP TERMINALS MILLI-GRID, (15u") SELECT GOLD 50394	MOLEX	50394-8100/ 50394-8052			14
103	J2	RJ45 8C CATEGORY 5 "NO FAIL"	VENDOR: DATA COMM WHSE.	DCD1449	201-0008-901		
104	*	4" TIE WRAP					2
W1	***	CABLE TWISTED PAIR, ETHERNET PATCH CATEGORY 5 CABLE ROUND-8 CONDUCTOR	VENDOR: DATA COMM WHSE.	DBC1134BL	109-2000-000		8'
* *** ALT WIRE MAY BE USED MUST BE CAT 5 TWISTED PAIRS							

*

*

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE FRACTIONS ANGLES +/- 1/2" DECIMALS .XX ± .03 .XXX ± .010	CUSTOMER APPROVAL	DATE	WinSystems, Inc. "THE EMBEDDED PC AUTHORITY" CBL-267-3 EPX, 10 POS TO RJ45 PLUG	
	APPROVAL	DATE		
MACHINE FINISH ✓	CHECKER	DATE	SIZE C	CAGE CODE 1AU87
	DRAFT/DESIGN M.BROWNING	DATE 11/10/04	DWG NO. CBL2673.DWG	REV A
			SCALE	CAD ID
			SHEET 1 OF 1	

CAD ID: \\P\DWG\9\STDCBL\CBL2673.DWG

1

5

4

3

2