



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A		02.03.2010	M.BROWNING
	B	CHANGED CONNECTOR'S HOUSING TO 51110-0860	07/20/2010	V. TRAN

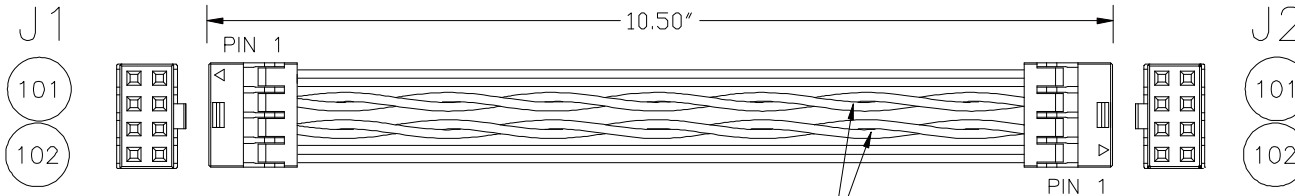

J1	TWISTED SIGNALS
3	USB0 D- PAIRS WITH USB0 D+
5	USB0 D+
4	USB1 D- PAIRS WITH USB1 D+
6	USB1 D+

NOTE: 3 TWISTS PER INCH TYPICAL.

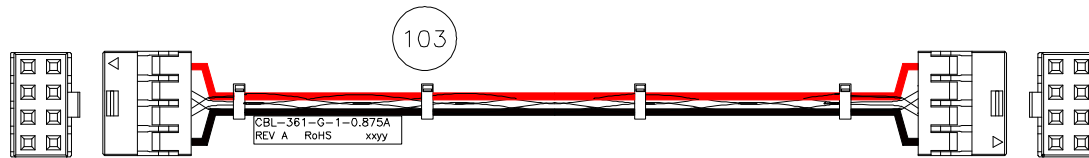

WIRE LIST			
J1	J2	COLOR	SIGNAL
1	1	W2 RED	USB0+5V
2	2	W2 RED	USB1+5V
3	3	W4 WHITE	USB0 D-
4	4	W4 WHITE	USB1 D-
5	5	W3 GREEN	USB0 D+
6	6	W3 GREEN	USB1 D+
7	7	W1 BLACK	USB0GND
8	8	W1 BLACK	USB1GND

Assembly Must Comply With Specifications of Manufacture and Acceptance (RoHS M&A) of RoHS Compliant Cable and Cable Assemblies for WinSystems, Inc. Rev B 11.11.2008

DET.	REF.	DESCRIPTION	MANUFACTURER	MPART NO.	QTY	
101	J1	HOUSING 2.00MM, 8 POS	MOLEX	51110-0860	2	ROHS
102		CRIMP TERMINAL 50394	MOLEX	50394-8051	16	ROHS
W1		WIRE, 26 AWG, BLACK	ALPHA WIRE	7053-2	20'	
W2		WIRE, 26 AWG, RED	ALPHA WIRE	7053-3	20'	ROHS
W3		WIRE, 26 AWG, GREEN	ALPHA WIRE	7053-4	20'	ROHS
W4		WIRE, 26 AWG, WHITE	ALPHA WIRE	7053-1	20'	
103		WIRE TIE 4"	PANDUIT	PLT1M-M	4	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
 TOLERANCE FRACTIONS ANGLES +/- 1/2" DECIMALS: .XX ± .03 .XXX ± .010

MACHINE FINISH:

CUSTOMER APPROVAL	DATE
APPROVAL	DATE
CHECKER	DATE
DRAFT/DESIGN M.BROWNING	DATE 02.03.2010

WinSystems, Inc.
 THE EMBEDDED PC AUTHORITY

CBL-361-G-1-0.875 *RoHS*
 10.5" 2MM 8 POS to 2MM 8 POS
 ENC-EBC-Z5XX

SIZE C CAGE CODE 1AUB7 DWG NO. REV B
 SCALE CAD ID: SHEET 1 OF 1